

リード線加工（バルク）品

■形状寸法



形状 記号・図	型名	寸法 (mm)									
		L	D	d	P	h	h ₁	K	l	l ₁	do
FL 	RD-S2FL**** (050)	3.3	1.7	0.45	5.0±1.0	7min	-	-	-	-	-
	RD-S2FL**** (075)				7.5±1.0						
	RD-25FL**** (100)	6.3	2.3	0.6	10.0±1.0	7min	-	-	-	-	-
	RD-25FL**** (125)				12.5±1.0						
	RD-S1FL**** (100)	6.3	2.3	0.6	10.0±1.0	7min	-	-	-	-	-
	RD-S1FL**** (125)				12.5±1.0						
	RD-50FL**** (125)	8.5	2.8	0.6	12.5±1.0	7min	-	-	-	-	-
	RD-50FL**** (150)				15.0±1.0						
	RO-S2FL***** (050)	3.3	1.7	0.45	5.0±1.0	7min	-	-	-	-	-
	RO-S2FL***** (075)				7.5±1.0						
	RO-25FL***** (100)	6.3	2.3	0.6	10.0±1.0	7min	-	-	-	-	-
	RO-25FL***** (125)				12.5±1.0						
	RO-S1FL***** (100)	6.3	2.3	0.6	10.0±1.0	7min	-	-	-	-	-
	RO-S1FL***** (125)				12.5±1.0						
	RO-50FL***** (125)	8.5	2.8	0.7	12.5±1.0	7min	-	-	-	-	-
	RO-50FL***** (150)				15.0±1.0						
	RO-1FL***** (150)	11.0	3.7	0.7	15.0±1.0	7min	-	-	-	-	-
	RG (X) -12SFL**** (100)	6.3	2.5	0.6	10.0±1.0	10±2	-	-	-	-	-
	RG (X) -12SFL**** (125)				12.5±1.0						
	RG (X) -1SFL**** (125)	9.0	2.8	0.7	12.5±1.0	13±3	-	-	-	-	-
	RG (X) -1SFL**** (150)				15.0±1.0						
	RG (X) -2SFL**** (150)	11.0	4.0	0.8	15.0±1.0	13±3	-	-	-	-	-
	RG (X) -2SFL**** (175)				17.5±1.0						
	RG (X) -3SFL**** (200)	15.0	5.5	0.8	20.0±1.5	18±3	-	-	-	-	-
	RG (X) -14ANFL**** (100)	6.3	2.5	0.6	10.0±1.0	10±2	-	-	-	-	-
	RG (X) -14ANFL**** (125)				12.5±1.0						
	RG (X) -12ANFL**** (125)	9.0	2.8	0.7	12.5±1.0	13±3	-	-	-	-	-
	RG (X) -12ANFL**** (150)				15.0±1.0						
	RG (X) -1ANFL**** (150)	11.0	4.0	0.7	15.0±1.0	13±3	-	-	-	-	-
	RG (X) -1ANFL**** (175)				17.5±1.0						
	RG (X) -2ANFL**** (200)	15.0	5.5	0.8	20.0±1.5	18±3	-	-	-	-	-
	RW-12FL**** (125)	9.0	3.5	0.7	12.5±1.0	13±3	-	-	-	-	-
	RW-12FL**** (150)				15.0±1.0						
	RW-1FL**** (150)	11.0	4.0	0.8	15.0±1.0	13±3	-	-	-	-	-
	RW-1FL**** (175)				17.5±1.0						
	RW-2FL**** (200)	15.0	5.5	0.8	20.0±1.5	18±3	-	-	-	-	-
	RQA-14FL**** (100)	6.3	2.3	0.6	10.0±1.0	10±2	-	-	-	-	-
	RQA-14FL**** (125)				12.5±1.0						
	RQA-12FL**** (125)	9.0	2.8	0.7	12.5±1.0	13±3	-	-	-	-	-
	RQA-12FL**** (150)				15.0±1.0						
	RQA-1FL**** (150)	11.0	4.0	0.8	15.0±1.0	13±3	-	-	-	-	-
	RQA-1FL**** (175)				17.5±1.0						
	RQA-2FL**** (200)	15.0	5.5	0.8	20.0±1.5	18±3	-	-	-	-	-

※標準包装数量：100pcs

※上記以外の加工寸法にも対応できる場合がありますのでお問い合わせ下さい。

リード線加工（バルク）品

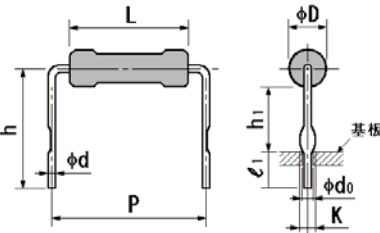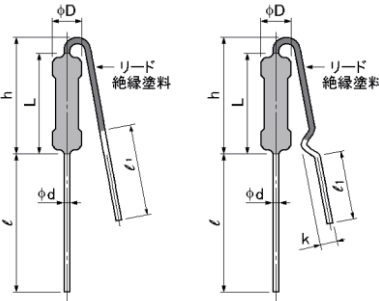


形状 記号・図	型名	寸法 (mm)										
		L	D	d	P	h	h ₁	K	l	l ₁	do	
P, H 	RG (X) -12SP**** (100)	6.3	2.5	0.6	10.0±1.5	9.5±3	4.0±1.5	1.2	—	4.0±1.5	0.8	
	RG (X) -1SP**** (125)	9.0	2.8	0.7	12.5±1.5	9.5±3	4.0±1.5	1.3	—	4.0±1.5	0.8	
	RG (X) -2SH**** (150)	11.0	4.0	0.8	15.0±1.5	13±3	6.0±2.0	1.4	—	5.0±1.5	1.0	
	RG (X) -3SH**** (200)	15.0	5.5	0.8	20.0±1.5	18±3	10.0±2.0	1.4	—	5.0±1.5	1.0	
	RG (X) -14ANP**** (100)	6.3	2.3	0.6	10.0±1.5	10±2	4.0±1.5	1.2	—	4.0±1.5	0.8	
	RG (X) -12ANP**** (125)	9.0	3.5	0.7	12.5±1.5	10±2	4.0±1.5	1.3	—	4.0±1.5	0.8	
	RG (X) -1ANH**** (150)	11.0	4.0	0.7	15.0±1.5	13±3	6.0±1.5	1.4	—	5.0±1.5	1.0	
	RG (X) -2ANH**** (200)	15.0	5.5	0.8	20.0±1.5	18±3	10.0±1.5	1.4	—	5.0±1.5	1.0	
	RW-12P**** (125)	9.0	3.5	0.7	12.5±1.5	10±2	4.0±1.5	1.3	—	4.0±1.5	0.8	
	RW-1H**** (150)	11.0	4.0	0.8	15.0±1.5	13±3	6.0±1.5	1.4	—	5.0±1.5	1.0	
	RW-2H**** (200)	15.0	5.5	0.8	20.0±1.5	18±3	10.0±1.5	1.4	—	5.0±1.5	1.0	
V 	a	RD-S2V****	3.3	1.7	0.45	—	5.5max	—	—	28±3	15min	—
	a	RO-S2V*****	3.3	1.7	0.45	—	5.5max	—	—	28±3	15min	—
	b	RD-25V****	6.3	2.3	0.6	—	8.5±1.0	—	2.5max	28±3	12min	—
	b	RD-S1V****	6.3	2.3	0.6	—	8.5±1.0	—	2.5max	28±3	12min	—
	b	RD-50V****	8.5	2.8	0.7	—	10±1.0	—	2.5max	28±3	10min	—
	b	RO-25V*****	6.3	2.3	0.6	—	8.5±1.0	—	2.5max	28±3	12min	—
	b	RO-S1V*****	6.3	2.3	0.6	—	8.5±1.0	—	2.5max	28±3	12min	—
	b	RO-50V*****	8.5	2.8	0.7	—	10±1.0	—	2.5max	28±3	10min	—
	b	RG (X) -12SV****	6.3	2.5	0.6	—	8.5±1.0	—	2.5max	28±3	12min	—
	b	RG (X) -1SV****	9.0	2.8	0.7	—	11±1.0	—	2.5max	28±3	10min	—
	b	RG (X) -2SV****	11.0	4.0	0.8	—	14±1.0	—	2.5max	28±3	15min	—
	b	RG (X) -3SV****	15.0	5.5	0.8	—	17±1.5	—	2.5max	25±3	12min	—
	b	RG (X) -14ANV****	6.3	2.3	0.6	—	8.5±1.0	—	2.5max	28±3	12min	—
	b	RG (X) -12ANV****	9.0	2.8	0.7	—	11±1.0	—	2.5max	28±3	10min	—
	b	RG (X) -1ANV****	11.0	4.0	0.8	—	14±1.0	—	2.5max	28±3	15min	—
	b	RG (X) -2ANV****	15.0	5.5	0.8	—	17±1.5	—	2.5max	25±3	12min	—
	b	RQA-14V****	6.3	2.3	0.6	—	8.5±1.0	—	2.5max	28±3	12min	—
	b	RQA-12V****	9.0	2.8	0.7	—	11±1.0	—	2.5max	28±3	10min	—
	b	RQA-1V****	11.0	4.0	0.8	—	14±1.0	—	2.5max	28±3	15min	—
	b	RQA-2V****	15.0	5.5	0.8	—	17±1.5	—	2.5max	25±3	12min	—

※標準包装数量：100pcs

※上記以外の加工寸法にも対応できる場合がありますのでお問い合わせ下さい。また、下記形状についての詳細は、お問い合わせ下さい。

S 	W
--------------	--------------




テーピング加工品

■形状寸法


アキシャルテーピング

形状図	型名	標準梱包数 (pcs/Box)	テーピング寸法 (mm)			梱包箱寸法 (mm)		
			W	W ₀	P	a±3	b±5	c±3
テーピング 	RD-S2T****T-26 *	5,000	26.0±1.0	40.0max	5.0±0.3	50	255	90
	RD-25T****T-26	4,000				50	255	90
	RD-S1T****T-26	4,000				50	255	90
	FRD-S2T****T-26 *	5,000				50	255	90
	FRD-25T****T-26	4,000				50	255	90
	FRD-S1T****T-26	4,000				50	255	90
	RO-S2T*****T-26 *	5,000				50	255	90
	RO-25T*****T-26	4,000				50	255	90
	RO-S1T*****T-26	4,000				50	255	90
	MGC-S2T*****T-26 *	5,000				50	255	90
	MGC-25T*****T-26	4,000				50	255	90
	MGC-S1T*****T-26	4,000				50	255	90
	RG(X)-12S****T-26	4,000				50	255	90
	RG(X)-14AN****T-26	4,000				50	255	90
	RW-12T****T-26	4,000				50	255	90
	RQA-14T****T-26	4,000				50	255	90
梱包箱 	RD-S2T****T-52	5,000	52.0±1.0	66.0max	5.0±0.3	75	255	75
	RD-25T****T-52	2,000				75	255	50
	RD-S1T****T-52	2,000				75	255	50
	RD-50T****T-52	2,000				75	255	70
	FRD-S2T****T-52	5,000				75	255	75
	FRD-25T****T-52	2,000				75	255	50
	FRD-S1T****T-52	2,000				75	255	50
	FRD-12T****T-52	2,000				75	255	70
	RO-S2T*****T-52	5,000				75	255	75
	RO-25T*****T-52	2,000				75	255	50
	RO-S1T*****T-52	2,000				75	255	50
	RO-50T*****T-52	2,000				75	255	70
	RO-1T*****T-52	1,000				75	255	71
	MGC-S2T*****T-52	5,000				75	255	75
	MGC-25T*****T-52	2,000				75	255	50
	MGC-S1T*****T-52	2,000				75	255	50
	MGC-50T*****T-52	1,000				75	255	70
	MGC-1T*****T-52	1,000				75	255	70
	MGC-1S****T-52	2,000				75	255	70
	MGC-2S****T-52	1,000				75	255	70
	RG(X)-12S****T-52	2,000				75	255	50
	RG(X)-1S****T-52	2,000				75	255	70
	RG(X)-2S****T-52	1,000				75	255	70
	RG(X)-14AN****T-52	2,000				75	255	50
	RG(X)-12AN****T-52	2,000				75	255	70
	RG(X)-1AN****T-52	1,000				75	255	70
	RW-12T****T-52	2,000				75	255	70
	RW-1T****T-52	1,000				75	255	70



ラジアルテーピング

◆形状図

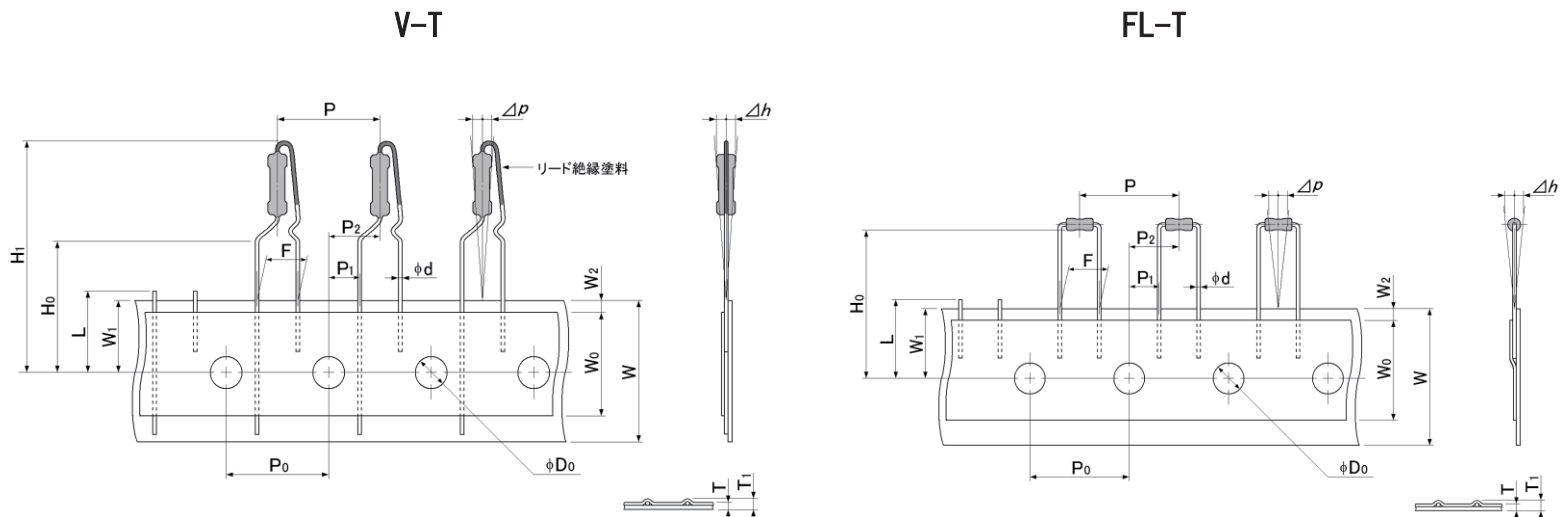

◆テーピング寸法

項目	寸法 (mm)	項目	寸法 (mm)	項目	寸法 (mm)
P	12.7±1.0	Δh	2max	H ₀	下表参照
P ₀	12.7±0.3	Δp	1.3max	H ₁	下表参照
P ₁	3.85±0.70	W	18.0±0.5	D ₀	4.0±0.2
P ₂	6.35±1.00	W ₀	13.5max	T	0.9max
d	下表参照	W ₁	9.0±0.5	T ₁	T + d max
F	5.0±0.5	W ₂	1.5max	L	11max

◆梱包

形状 記号	箱形状	型名	梱包数 (pcs/Box)	テーピング寸法 (mm)			箱寸法 (mm)		
				d	H ₀	H ₁	a±2	b±10	c±2
V-T		RD-25V****T	2,000	0.6±0.05	16.0±0.5	29.0max	46	325	131
		RD-S1V****T	2,000	0.6±0.05		29.0max	46	325	131
		FRD-25V****T	2,000	0.6±0.05		29.0max	46	325	131
		FRD-S1V****T	2,000	0.6±0.05		29.0max	46	325	131
		RO-25V*****T	2,000	0.6±0.05		29.0max	46	325	131
		RO-S1V*****T	2,000	0.6±0.05		29.0max	46	325	131
		MGC-25V*****T	2,000	0.6±0.05		29.0max	46	325	131
		MGC-S1V*****T	2,000	0.6±0.05		29.0max	46	325	131
		MGC-1SV****T	2,000	0.6±0.05		29.0max	53	325	105
		RG(X)-12SV****T	2,000	0.6±0.05		29.0max	46	325	131
		RG(X)-1SV****T	2,000	0.6±0.05		29.0max	53	325	105
		RG(X)-2SV****T	1,000	0.6±0.05		34.5max	53	325	105
		RG(X)-14ANV****T	2,000	0.6±0.05		29.0max	46	325	131
		RG(X)-1ANV****T	1,000	0.6±0.05		34.5max	53	325	105
		RQA-14V****T	2,000	0.6±0.05		29.0max	46	325	131
		RQA-12V****T	2,000	0.6±0.05		29.0max	53	325	105
		RQA-1V****T	1,000	0.6±0.05		34.5max	53	325	105
FL-T		RD-S2FL****T	2,000	0.45±0.05	22.0+0.5/-1.0	—	46	325	119
		FRD-S2FL****T	2,000	0.45±0.05		—	46	325	119
		RO-S2FL*****T	2,000	0.45±0.05		—	46	325	119
		MGC-S2FL*****T	2,000	0.45±0.05		—	46	325	119